

BEST AVAILABLE COPY

PATENT SPECIFICATION

(11) 1 215 840

DRAWINGS ATTACHED



1 215 840

(21) Application No. 21944/68 (22) Filed 9 May 1968

(45) Complete Specification published 16 Dec. 1970

(51) International Classification B 67 b 7/28

(52) Index at acceptance

B8T 41 45

A4D B4

(72) Inventor - WILLY GOTTLIEB LAMPE

(54) APPARATUS FOR PIERCING CONTAINERS FOR USE IN BEVERAGE PRODUCING MACHINES

- (71) We, UNIVERSAL OIL PRODUCTS COMPANY, a corporation organized under the laws of the State of Delaware, United States of America, of No. 30 Algonquin Road, Des Plaines, Illinois, United States of America, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—
- This invention relates generally to apparatus for piercing and introducing a fluid into a container for infusion with a pre-selected beverage producing ingredient therein.
- More particularly, this invention is well suited for use in automatic beverage producing machines of the type primarily employed in aircraft galley equipment wherein the beverage is extracted from a beverage producing ingredient while the ingredient is still contained within the container in which it was originally packaged. It is of primary importance that such equipment be as compact as possible and require a minimum operating area so as not to distract a stewardess or hamper her in the performance of more important duties. Thus, while the present invention is peculiarly adapted for use in such machines, it will, nevertheless, be obvious that it is also applicable to beverage producing machines in general.
- Accordingly, the desideratum of the present invention is to provide an apparatus for quickly and efficiently piercing a container having a beverage producing ingredient therein to prepare the container for use in a beverage producing machine.
- Another object of the present invention is to provide an apparatus of the type described which simultaneously with the piercing operation, clamps the container in operative position in the machine.
- In a preferred form the present invention seeks to provide an apparatus for piercing a container having a beverage producing ingredient therein for utilization in beverage producing machines which occupies a minimum amount of space, and which requires a smaller operating area than apparatus used heretofore.
- In apparatuses of the type described, it is imperative that the equipment be cleaned periodically thereby maintaining proper health procedures to prevent contamination of the apparatus by bacteria. Accordingly, the invention seeks in a preferred form to provide can piercing equipment that is easily disassembled for cleaning purposes.
- According to the present invention there is provided an apparatus for use in a beverage producing machine for piercing containers having a beverage producing ingredient therein comprising a top piercing assembly; a bottom piercing assembly; actuating means for moving one of said piercing assemblies relative to the other to clamp and pierce opposed surfaces of a container received therebetween; said actuating means including a lever means adapted to be connected to the said machine for rotational movement with respect to said top and bottom piercing assemblies; translating means interconnecting said lever means and said one of said piercing assemblies for translating the rotational motion of said lever means into linear movement of said one of said assemblies, (whereby the rotation of the lever means in a first direction causes said top and bottom assemblies to pierce and clamp a container received therebetween, and movement of said lever means in a second direction causes said top and bottom piercing assemblies to separate for the removal of a container therefrom and for the insertion of a new container therebetween), said translating means including a bracket means connected to said one of said piercing assemblies; mounting means adapted to mount said bracket means on said machine for linear

[F

movement of said one of said piercing assemblies relative to the other of said piercing assemblies; and connecting means connecting said lever means and said bracket means for conjoint movement; said bottom piercing assembly including a cup-like member for receiving the base of the container therein, a plate removably received in said cup-like member and supporting a plurality of upwardly projecting piercing elements thereon for piercing the bottom surface of said container, said piercing elements terminating below the upper edge of said cup-like member, and at least one passage in preselected ones of said plurality of piercing elements providing for the passage of a beverage therethrough.

One embodiment of an apparatus according to this invention is hereinafter more fully described with reference to the accompanying drawings in which: —

Figure 1 is a perspective view of an apparatus constructed according to the present invention, illustrating the apparatus in the unlatched position for receiving a container therein;

Figure 2 is a vertical sectional view of the apparatus shown in Figure 1, showing the apparatus in the latched position with a container packed with a beverage producing ingredient received therein; and

Figure 3 is a top plan view of the bottom piercing assembly shown in Figure 1.

The apparatus of the present invention is designated generally by the numeral 10 in Figures 1 and 2 and includes a bottom piercing assembly 12, a top piercing assembly 14 and an actuating assembly 16. More particularly, the top piercing assembly 14 includes an inverted cup-like member 17 having an upper circular wall 18 and a depending peripheral flange 20 that is flared outwardly at its lower end 21 to form an entrance-way for a container to be cupped therein. A hollow tube 22 extends axially downward through the wall 18 and terminates above and within the confines of the bottom edge of the flange 20 in a pointed end 24 to provide a top piercing element. A resilient washer 26 surrounds the tube 22 and abuts the under-surface of the wall 18 to provide a fluid tight fitting. The top piercing assembly 14 is adapted to be fixedly connected to a beverage producing machine of the kind disclosed in United States Letters Patent No. 3,016,930 to Dziedziula et al., and the top of tube 22 is connected to a source of liquid in the machine by appropriate means, not shown, and forming no part of this invention.

Although the top piercing assembly 14 is adapted to be fixedly connected to a beverage producing machine and, therefore, is essentially stationary, the purpose of the invention is to cause a relative movement

between the piercing assemblies 12 and 14 such that the container is clamped therebetween and pierced during such movement. In accomplishing this purpose, because the piercing assembly 14 is stationary, the piercing assembly 12 is made movable in response to the operation of the actuating assembly 16.

The bottom piercing assembly 12 includes an annular ring 28 having a central through bore 30 and an upstanding peripheral flange 32. The ring 28 is connected at 33 to a pair of opposed brackets 34, as by welding, which form a portion of the actuating assembly 16. Received on the ring 28 is a cup-like member 36 having a bottom circular wall 38 that abuts and is supported by the ring 28, and an upward directed peripheral flange 40 that is flared outwardly at its upper end 41 to form an opening for a container to be received therein. Depending from, and integral with the wall 38 is a hollow funnel 42 that curves inwardly and downwardly and terminates in a narrow-neck portion 44 at the lower end thereof, and which communicates with a central through opening 46 in the wall 38 at the other end. As shown in FIG. 2, the funnel 42 is slidably received through the bore 30 in the ring 28. Additionally, the member 36 seats within the flange 32 so that the member 36 and the ring 28 may easily be separated.

Removably received within the cup-like member 36 is a circular plate 48 having a plurality of spaced upstanding bottom piercing elements 50 thereon. Each of the piercing elements 50 comprises a three-sided pyramid that terminates in an upper piercing point 52 which is spaced below the upper edge and within the confines of the flange 40. The edges formed by the adjacent sides or facets of the pyramids are sharp to provide cutting edges. A central bore 54 extends through each element 50 and the plate 48, and communicates with passages 56 which are received in the respective sides or facets of each pyramidal element. The elements 50 are positioned on the plate 48 so that the respective bores 54 communicate with the opening 46 in the member 36.

A plurality of circumferentially spaced pins 58 (FIG. 3) project radially inward from the flange 40 and they are spaced above the wall 38 by a distance slightly in excess of the thickness of the plate 48. The pins 58 are adapted to overlie the edges of the plate 48 thereby to maintain the plate in the member 36. The plate 48 is provided with a corresponding number of circumferentially spaced slots 60 which are adapted to be aligned with the respective pins 58 and which allow the pins 58 to pass therethrough. Thus, when the plate 48 is dropped into or placed within the member 36, the

slots 60 are aligned with the respective pins 58 and the plate 48 rests in engagement with the wall 38. The plate 48 is then rotated so that the respective slots 60 and the pins 58 are out of alignment (FIG. 3) thereby locking the plate 48 in place. The above procedure may be reversed when it is desired to separate the plate 48 and the member 36.

In practice, the top piercing and bottom piercing assemblies 14 and 12 are coaxial. The actuating assembly 16 is illustrated in detail in FIG. 1 and includes the opposed brackets 34 which are slidably received in respective channels 62 which are connected to the beverage producing machine so that the brackets 34 may be guided for vertical movement. The brackets 34 include intumed legs 64 that extend toward each other for a pre-selected length so that the distance between them is less than the diameter of the ring 28. The ring 28 is seated on and connected to the legs 64 and, therefore, will move with the brackets 34.

The assembly 16 further includes a hollow tube 66 that rotatably receives a coaxial shaft 68 therethrough. The ends of the shaft 68 are fixedly connected to the beverage producing machine by appropriate means, not shown, so that the tube 66 is rotatable with respect to the machine. Opposed arms 70 and 72 extend laterally forwardly from the tube 66; the arm 70 is longer than the arm 72 and a handle 74 depends from the end of arm 70. More particularly, the handle 74 is provided with a bifurcated end 76 that receives the arm 70 in the forked slot 75 defined thereby. A pivot pin 78 connects the handle 74 to the arm 70 for pivotal movement with respect thereto. Accordingly, when the handle 74 is pulled forward and upward, the forward edge of the arm 70 will engage the bottom surface of the slot 75 and cause the arm 70 and, therefore, the arm 72 to swing upward in an arc about the axis of the tube 66. The arms 70 and 72 are provided with aligned elongated slots 80 intermediate their ends. Each of the slots 80 slidably receives a pin 82 that projects rearwardly from each bracket 34 to provide a lost motion connection between the pins and the respective slots. The connections comprising the slots 80 and the respective pins 82 translate the arcuate or rotational motion of the arms 70 and 72 into corresponding vertical movement of the brackets 34.

A latch plate 84 is adapted to co-operate with a laterally projecting pin 86 carried by the arm 70 to latch the actuating assembly 16 in an operative position. More particularly, the latch plate 84 is pivotally mounted on the beverage producing machine by a pivot pin 87. A torsion spring 88 engages the plate 84 and biases the lower

portion of the plate about the pin 87 and in the direction indicated by an arrow 90. A stop pin 92 is adapted to engage an arcuate cam surface 94 on the face of the plate 84 to limit the movement of the plate in the aforementioned direction. Provided in the plate 84 is a slot 96 which extends to the cam surface 94. Accordingly, as the arms 70 and 72 are moved upwardly, the pin 86 engages and rides on the cam surface 94 thereby rotating the latch plate 84 in a direction opposite to the direction indicated by the arrow 90. However, when the pin 86 is aligned with the slot 96, the torsion spring 88 will bias the plate 84 back to its original position thereby capturing the pin in the slot and latching the mechanism 16 in an operative position, as described more fully below.

A laterally projecting ear 98 is provided on the plate 84 adjacent to the top edge thereof. The ear 98 is adapted to be moved manually in the direction indicated by an arrow 100 to rotate the plate 84 about the pivot pin 87 and in a direction to release the pin 86 thereby to unlatch the actuating assembly 16.

In operation, the actuating assembly 16 is moved to its lowermost position and the member 36 having the plate 48 therein is placed on the ring 28. A sealed container C of conventional metal construction and having a beverage producing ingredient B therein is placed in the cup-like member 36 with the bottom surface of the container C resting on the points 52 of the elements 50. Since the points 52 are spaced from the top edge of the flange 40, the flange 40 will surround the bottom portion of the container and maintain the container C in an upright position. The flared portion 41 of the member 36 facilitates the insertion of the container C therein. The handle 74 is then moved upward thereby causing the brackets 34 to move vertically upward. Thus, the bottom piercing assembly 12 will move toward the top piercing assembly 14 until the upper portion of the container C is received within the area defined by the flange 20 and the upper surface of the container abuts the pointed edge 24 of the tube 22. The flared end of the flange 20 facilitates the reception of the container C into the aforementioned area.

The continued upward movement of the handle 74 causes a force to be exerted on the upper and lower container surfaces at the respective point contacts 24 and 52 of the piercing elements. This force increases in proportion to the upward force on the handle 74 and the arm 70 until the piercing elements 50 and the pointed edge 24 of the tube 22 pierce the lower and upper surfaces of the container C. The upward movement of the handle 74 is continued until the latch

4 plate 84 engages the pin 86 to latch the  
assembly 16 in the upper position. The  
elements comprising the apparatus 10 are  
5 sized so that when the assembly 16 is  
latched, the container C will be clamped  
between the bottom and top piercing  
assemblies 12 and 14 and the top surface  
of the container C will compress the washer  
26 to provide a seal about the puncture  
10 produced by the tube 22.

To produce the beverage, the fluid (not  
shown) is selectively allowed to flow through  
the tube 22 and leach through the beverage  
producing ingredient B in the container C.  
15 The beverage flows through the passages  
56 in each of the elements 50 and through  
the respective bores 54 into the funnel 42.  
As a result, the beverage will pour out of  
the narrow-neck portion 44, which serves  
20 as a pouring spout, and into a flask or cup  
positioned therebeneath.

When it is desired to remove the container  
C, the assembly 16 is unlatched in the  
aforenoted manner and moved to its lower  
25 position. The container C is thereby sep-  
arated from the top piercing assembly 14 and  
carried to the lower position by the member  
36. The container C may then be removed  
from the bottom piercing assembly 12 and  
30 discarded and a new container placed into  
the apparatus 10. It is to be noted that none  
of the elements comprising the apparatus 10  
are positioned in front of the top and  
bottom piercing assemblies thereby to  
35 obstruct or hamper the removal or the  
insertion of a container. Hence, the present  
apparatus greatly facilitates such operations.  
Additionally, since the handle 74 is sub-  
stantially in a vertical plane, the overall  
40 length of the apparatus is decreased thereby  
providing a compact unit.

Accordingly, an apparatus has been pro-  
vided for piercing and introducing a fluid  
into containers having pre-selected beverage  
45 producing ingredients therein which occupies  
a minimum area, and which is openly  
accessible to facilitate the insertion or the  
removal of a container therefrom. More-  
over, since the ring 28, the member 36 and  
50 the plate 48 are readily separable, the  
cleaning of the apparatus is greatly facili-  
tated.

While there have been shown and de-  
scribed and pointed out the fundamental  
55 novel features of the invention as applied  
to a preferred embodiment thereof, it will  
be understood that various omissions and  
substitutions and changes in the form  
and details of the device illustrated and in  
60 its operation may be made by those skilled  
in the art, without departing from the scope  
of the invention as defined by the claims  
appended hereto.

#### WHAT WE CLAIM IS:—

65 1. An apparatus for use in a beverage

producing machine for piercing containers  
having a beverage producing ingredient  
therein comprising:—

a top piercing assembly, 70  
a bottom piercing assembly,  
actuating means for moving one of said  
piercing assemblies relative to the other to  
clamp and pierce opposed surfaces of a  
container received therebetween,

said actuating means including a lever 75  
means adapted to be connected to the said  
machine for rotational movement with  
respect to said top and bottom piercing  
assemblies,

translating means interconnecting said 80  
lever means and said one of said piercing  
assemblies for translating the rotational  
motion of said lever means into linear move-  
ment of said one of said assemblies,

whereby the rotation of the lever means 85  
in a first direction causes said top and  
bottom assemblies to pierce and clamp a  
container received therebetween, and move-  
ment of said lever means in a second direc-  
90 tion causes said top and bottom piercing  
assemblies to separate for the removal of  
a container therefrom and for the insertion  
of a new container therebetween,

said translating means including a bracket 95  
means connected to said one of said piercing  
assemblies,

mounting means adapted to mount said 100  
bracket means on said machine for linear  
movement of said one of said piercing  
assemblies relative to the other of said pier-  
cing assemblies, and

connecting means connecting said lever  
means and said bracket means for conjoint  
movement,

said bottom piercing assembly including a 105  
cup-like member for receiving the base of  
the container therein,

a plate removably received in said cup-  
like member and supporting a plurality of  
upwardly projecting piercing elements 110  
thereon for piercing the bottom surface of  
said container, said piercing elements  
terminating below the upper edge of said  
cup-like member,

and at least one passage in pre-selected 115  
ones of said plurality of piercing elements  
providing for the passage of a beverage  
therethrough.

2. An apparatus according to Claim 1,  
and passages in said top and bottom 120  
piercing assemblies for providing for the  
passage of a fluid into the container, through  
the beverage producing ingredient therein,  
and out of said container.

3. An apparatus according to Claim 1 125  
or 2,

and a latch for latching the actuating  
means in a position wherein a container is  
pierced by the top and bottom piercing  
assemblies and is clamped therebetween. 130

4. An apparatus according to any of Claims 1 to 3,  
wherein said mounting means comprise channels slidably receiving the bracket means therein.
5. An apparatus according to any of Claims 1 to 4,  
wherein said bracket means comprises a pair of opposed brackets connected to said one of said piercing assemblies,  
and said lever means comprises a pair of opposed arms individually connected to a respective bracket by said connecting means, one of said pair of opposed arms being longer than the other of said opposed arms, and a depending handle pivotally connected to said longer one of said opposed arms and adapted to engage the lower edge thereof to move said lever means in the said first direction.
6. An apparatus according to Claim 5, including a tube connecting one of the ends of said opposed arms,  
and a shaft rotatably received through said tube and adapted to be fixedly connected to the machine to rotatably mount said opposed arms on the machine.
7. An apparatus according to Claims 5 or 6,  
wherein said connecting means comprises an elongated slot in each of said opposed arms,  
and a pin projecting from each of said brackets being slidably received in a respective elongated slot whereby the rotational movement of said lever means is translated into linear movement of said brackets.
8. An apparatus according to any of Claims 1, to 7,  
and a hollow funnel, having a narrow-neck portion, connected to the bottom of said cup-like member and communicating with the passages in said pre-selected ones of said plurality of piercing elements to provide a beverage pouring spout at the narrow-neck portion thereof.
9. An apparatus according to any of Claims 1 to 8,  
wherein said top piercing member comprises an inverted cup-like member for receiving the top of a container therein, a central piercing element in said inverted cup-like member terminating above the lower edge of said member and within the confines thereof,  
a passage in said central piercing element for providing for the passage of a fluid therethrough, and a resilient washer received about said central piercing element and adapted to be compressed between said cup-like member and the container to provide an air-tight seal therebetween.
10. An apparatus for use in a beverage-producing machine for piercing containers having a beverage-producing ingredient therein, substantially as hereinbefore described with reference to and as illustrated in the accompanying drawing.

J. Y. & G. W. JOHNSON,  
Furnival House,  
14-18, High Holborn,  
London, W.C.1.  
Chartered Patent Agents,  
Agents for the Applicants.

1215040

COMPLETE SPECIFICATION

1 SHEET

This drawing is a reproduction of  
the Original on a reduced scale

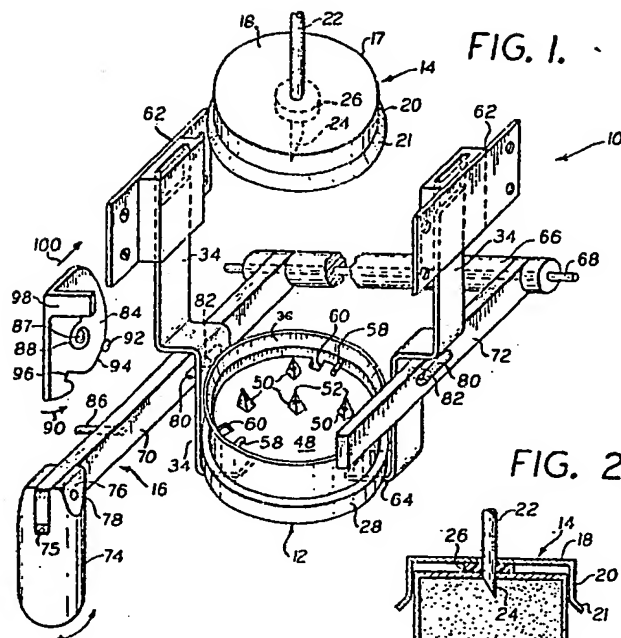


FIG. 2.

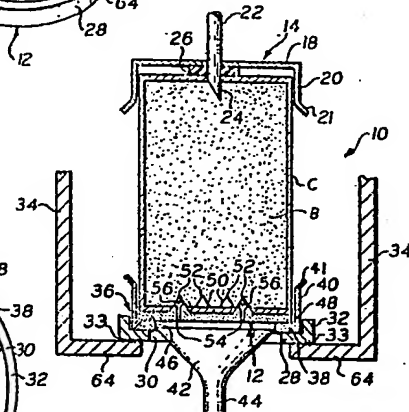


FIG. 3.

